

VertuEau

OSMOSEUR DIRECT FLUX



-  CONTROLE DES FILTRES
-  HAUTE EFFICACITE
-  ALARME SONORE
-  ROBINET CONNECTE
-  CONTROLE QUALITE PAR LED
-  FACILITE D'ENTRETIEN

EWI
LE CONTRAT
QUALITÉ


ASSURANCE
ENGAGEMENT
RÉSULTAT
GARANTIE
SAV
ENTRETIEN

04.76.07.18.18

SPECIFICATIONS

DIMENSIONS: (height x width x large): 414 mm x 130 mm x 445 mm
WEIGHT: 12 kg
FLOW RATE: 16 lpm
INLET TEMPERATURE: (max./ min.): 38° C / 5° C
INLET TDS: (max.): 1500 ppm.
INLET PRESSURE: (max./ min.): 4 bar-1 bar (400kPa-100kPa).
MEMBRANE: 500 GPD.
PUMP: Booster pump.
POWER SUPPLY : 24 Vdc.
ADAPTER: 100-240V. 50/60Hz: 24Vdc.

ROBINET CONNECTE

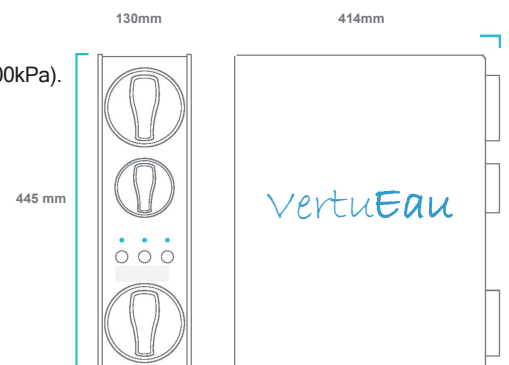

AMI DE NOTRE
ENVIRONNEMENT



Aquarium



Biberon



Ménage



Aliments



Cuisine



Au verre



Boissons